

CERTIFICATE OF ANALYSIS FOR


CERTIFIED REFERENCE MATERIAL

OREAS 289

Gold Ore (Loulo-Gounkoto Complex, Western Mali)



Accredited for compliance with ISO 17034



COA-1762-OREAS289-R4
BUP-70-10-01 Ver:2.0

13-Nov-2025

Table 1. Certified Value, Uncertainty & Tolerance Intervals for Au by FA and multi-elements by 4-Acid Digestion and Aqua Regia Digestion in OREAS 289.

Constituent	Certified Value†	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
Pb Fire Assay					
Au, Gold (ppm)	5.71	5.65	5.78	5.70*	5.73*
4-Acid Digestion					
Ag, Silver (ppm)	0.239	0.211	0.268	0.222	0.257
Al, Aluminium (wt.%)	5.96	5.75	6.17	5.82	6.10
As, Arsenic (ppm)	7080	6814	7347	6858	7303
Ba, Barium (ppm)	439	422	456	426	453
Be, Beryllium (ppm)	1.19	1.12	1.27	1.14	1.25
Bi, Bismuth (ppm)	1.62	1.50	1.74	1.51	1.72
Ca, Calcium (wt.%)	4.33	4.19	4.47	4.24	4.41
Cd, Cadmium (ppm)	0.10	0.08	0.12	IND	IND
Ce, Cerium (ppm)	47.7	44.7	50.8	45.3	50.2
Co, Cobalt (ppm)	203	197	210	199	208
Cr, Chromium (ppm)	52	47	57	49	55
Cs, Caesium (ppm)	4.11	3.92	4.30	3.99	4.24
Cu, Copper (ppm)	176	171	181	173	179
Dy, Dysprosium (ppm)	2.54	2.29	2.80	2.43	2.65
Er, Erbium (ppm)	1.23	1.09	1.36	1.12	1.33
Eu, Europium (ppm)	0.97	0.89	1.05	0.92	1.02
Fe, Iron (wt.%)	6.21	5.99	6.42	6.08	6.33
Ga, Gallium (ppm)	14.3	13.6	15.0	13.8	14.8
Gd, Gadolinium (ppm)	3.69	3.33	4.04	3.53	3.84
Hf, Hafnium (ppm)	1.96	1.77	2.15	1.86	2.07
Ho, Holmium (ppm)	0.45	0.38	0.52	0.42	0.49
In, Indium (ppm)	0.050	0.042	0.058	0.047	0.053
K, Potassium (wt.%)	1.27	1.22	1.32	1.23	1.30
La, Lanthanum (ppm)	23.2	21.8	24.6	22.2	24.2
Li, Lithium (ppm)	24.3	23.1	25.5	23.5	25.1
Lu, Lutetium (ppm)	0.17	0.15	0.19	IND	IND
Mg, Magnesium (wt.%)	1.89	1.82	1.95	1.84	1.93
Mn, Manganese (wt.%)	0.076	0.073	0.078	0.074	0.078
Mo, Molybdenum (ppm)	4.08	3.76	4.40	3.87	4.29
Na, Sodium (wt.%)	2.87	2.78	2.96	2.80	2.94
Nb, Niobium (ppm)	6.25	5.85	6.64	5.95	6.55
Nd, Neodymium (ppm)	21.8	20.0	23.5	20.4	23.1

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt.% (weight per cent) $\equiv$ % (mass fraction).

[†]The operationally defined measurand meets the requirements of ISO 17034 and all participating laboratories comply with the requirements of ISO 17025.

*Gold Tolerance Limits for typical 30g fire assay are determined from 20 x 85mg INAA results and the Sampling Constant (Ingamells & Switzer, 1973).

IND = indeterminate (due to limited reading resolution of the methods employed).

Note: intervals may appear asymmetric due to rounding.

Table 1 continued.

Constituent	Certified Value†	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
4-Acid Digestion continued					
Ni, Nickel (ppm)	55	53	58	54	57
P, Phosphorus (wt.%)	0.056	0.054	0.058	0.054	0.057
Pb, Lead (ppm)	13.7	12.9	14.6	13.0	14.5
Pr, Praseodymium (ppm)	5.60	5.09	6.11	5.33	5.86
Rb, Rubidium (ppm)	63	61	66	61	65
S, Sulphur (wt.%)	3.28	3.16	3.40	3.22	3.34
Sb, Antimony (ppm)	7.98	7.53	8.43	7.77	8.19
Sc, Scandium (ppm)	8.43	7.95	8.91	8.16	8.70
Sm, Samarium (ppm)	4.38	3.92	4.83	4.20	4.55
Sn, Tin (ppm)	1.98	1.81	2.15	1.84	2.12
Sr, Strontium (ppm)	191	185	198	188	195
Ta, Tantalum (ppm)	0.53	0.50	0.57	0.50	0.56
Tb, Terbium (ppm)	0.49	0.44	0.54	0.47	0.51
Te, Tellurium (ppm)	0.21	0.14	0.28	0.18	0.24
Th, Thorium (ppm)	7.01	6.56	7.47	6.60	7.42
Ti, Titanium (wt.%)	0.226	0.213	0.239	0.220	0.232
Tl, Thallium (ppm)	0.44	0.41	0.47	0.42	0.46
Tm, Thulium (ppm)	0.18	0.16	0.20	IND	IND
U, Uranium (ppm)	2.39	2.07	2.71	2.17	2.60
V, Vanadium (ppm)	64	60	67	62	66
W, Tungsten (ppm)	235	226	244	230	240
Y, Yttrium (ppm)	12.2	11.6	12.9	11.7	12.8
Yb, Ytterbium (ppm)	1.14	1.05	1.23	1.05	1.23
Zn, Zinc (ppm)	43.6	41.5	45.6	42.2	44.9
Zr, Zirconium (ppm)	67	62	71	64	69
Aqua Regia Digestion					
Ag, Silver (ppm)	0.233	0.215	0.251	0.212	0.253
Al, Aluminium (wt.%)	1.07	1.03	1.11	1.04	1.10
As, Arsenic (ppm)	6918	6695	7141	6755	7080
B, Boron (ppm)	10.9	9.6	12.2	10.2	11.6
Be, Beryllium (ppm)	0.63	0.58	0.69	0.60	0.67
Bi, Bismuth (ppm)	1.64	1.50	1.77	1.55	1.72
Ca, Calcium (wt.%)	3.80	3.67	3.92	3.72	3.88
Cd, Cadmium (ppm)	0.063	0.050	0.076	0.053	0.074
Ce, Cerium (ppm)	19.9	17.4	22.5	19.2	20.7
Co, Cobalt (ppm)	199	193	206	195	204

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt.% (weight per cent) $\equiv$ % (mass fraction).

[†]This operationally defined measurand meets the requirements of ISO 17034 and all participating laboratories comply with the requirements of ISO 17025.

Note: intervals may appear asymmetric due to rounding; IND = indeterminate (due to limited reading resolution of the methods employed).

Table 1 continued.

Constituent	Certified Value [†]	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
Aqua Regia Digestion continued					
Cr, Chromium (ppm)	39.2	37.6	40.9	38.1	40.4
Cs, Caesium (ppm)	3.34	3.18	3.50	3.22	3.47
Cu, Copper (ppm)	176	171	182	173	180
Dy, Dysprosium (ppm)	1.56	1.39	1.72	1.47	1.64
Er, Erbium (ppm)	0.67	0.58	0.77	0.62	0.72
Eu, Europium (ppm)	0.38	0.25	0.50	0.35	0.40
Fe, Iron (wt.%)	5.97	5.75	6.19	5.84	6.11
Ga, Gallium (ppm)	4.41	4.13	4.69	4.26	4.56
Gd, Gadolinium (ppm)	2.04	1.46	2.62	1.93	2.15
Ge, Germanium (ppm)	0.083	0.060	0.106	IND	IND
Hf, Hafnium (ppm)	0.29	0.27	0.31	0.27	0.31
Ho, Holmium (ppm)	0.24	0.21	0.28	0.23	0.26
In, Indium (ppm)	0.041	0.034	0.049	0.036	0.047
K, Potassium (wt.%)	0.399	0.384	0.415	0.389	0.410
La, Lanthanum (ppm)	8.53	7.40	9.65	8.11	8.94
Li, Lithium (ppm)	20.1	19.0	21.2	19.3	20.9
Lu, Lutetium (ppm)	0.076	0.068	0.085	IND	IND
Mg, Magnesium (wt.%)	1.80	1.74	1.86	1.75	1.84
Mn, Manganese (wt.%)	0.075	0.072	0.078	0.073	0.076
Mo, Molybdenum (ppm)	3.94	3.68	4.21	3.80	4.08
Na, Sodium (wt.%)	0.147	0.137	0.157	0.138	0.156
Nb, Niobium (ppm)	0.75	0.61	0.88	0.69	0.80
Ni, Nickel (ppm)	49.5	47.6	51.5	48.3	50.8
P, Phosphorus (wt.%)	0.049	0.047	0.050	0.047	0.050
Pb, Lead (ppm)	6.79	6.41	7.17	6.41	7.17
Rb, Rubidium (ppm)	37.0	34.8	39.2	36.0	38.1
S, Sulphur (wt.%)	3.24	3.14	3.35	3.17	3.32
Sb, Antimony (ppm)	5.55	5.04	6.05	5.30	5.80
Sc, Scandium (ppm)	6.00	5.66	6.35	5.75	6.26
Se, Selenium (ppm)	1.29	1.05	1.52	1.13	1.44
Sn, Tin (ppm)	1.35	1.26	1.45	1.28	1.43
Sr, Strontium (ppm)	83	80	87	81	86
Ta, Tantalum (ppm)	< 0.01	IND	IND	IND	IND
Tb, Terbium (ppm)	0.29	0.25	0.33	0.28	0.31
Te, Tellurium (ppm)	0.19	0.15	0.23	0.15	0.23
Th, Thorium (ppm)	2.37	2.08	2.66	2.19	2.56

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt.% (weight per cent) $\equiv$ % (mass fraction).

[†]This operationally defined measurand meets the requirements of ISO 17034 and all participating laboratories comply with the requirements of ISO 17025.

Note: intervals may appear asymmetric due to rounding; IND = indeterminate (due to limited reading resolution of the methods employed. For practical purposes the 95% Expanded Uncertainty can be set between zero and a two times multiple of the upper bound/non-detect limit value).

Table 1 continued.

Constituent	Certified Value [†]	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
Aqua Regia Digestion continued					
Ti, Titanium (wt.%)	0.097	0.092	0.102	0.094	0.100
Tl, Thallium (ppm)	0.33	0.31	0.35	0.31	0.35
U, Uranium (ppm)	1.42	1.25	1.59	1.29	1.55
V, Vanadium (ppm)	34.8	33.4	36.2	33.7	35.9
W, Tungsten (ppm)	183	173	194	179	188
Y, Yttrium (ppm)	6.61	6.22	6.99	6.40	6.81
Yb, Ytterbium (ppm)	0.54	0.46	0.63	0.51	0.58
Zn, Zinc (ppm)	40.1	38.4	41.8	38.7	41.5
Zr, Zirconium (ppm)	9.09	8.49	9.68	8.79	9.38

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt.% (weight per cent) $\equiv$ % (mass fraction).

[†]This operationally defined measurand meets the requirements of ISO 17034 and all participating laboratories comply with the requirements of ISO 17025.

Note: intervals may appear asymmetric due to rounding; IND = indeterminate (due to limited reading resolution of the methods employed).

Table 2. Certified Value, Uncertainty & Tolerance Intervals for other measurands in OREAS 289.

Constituent	Certified Value	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
PhotonAssay™ (recommended gross mass 440-470 g)					
Au, Gold (ppm)	5.73	5.68	5.78	5.73*	5.74*
Aqua Regia Digestion (sample mass 10-50g)					
Au, Gold (ppm)	5.51	5.37	5.66	5.50*	5.53*
Cyanide Leach					
Au, Gold (ppm)	5.17	5.08	5.27	5.17*	5.18*
Infrared Combustion					
S, Sulphur (wt.%)	3.31	3.26	3.37	3.27	3.35

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt.% (weight per cent) $\equiv$ % (mass fraction).

*Gold Tolerance Limits for typical 25g aqua regia digestion and 200g cyanide leach methods and 440-470 g

PhotonAssay™ methods are determined from 20 x 85mg INAA results and the Sampling Constant (Ingamells & Switzer, 1973).

Note: intervals may appear asymmetric due to rounding.

Table 3. Indicative Values for OREAS 289.

Constituent	Unit	Value	Constituent	Unit	Value	Constituent	Unit	Value
4-Acid Digestion								
B	ppm	27.0	Hg	ppm	1.39	Se	ppm	1.38
Ge	ppm	0.25	Re	ppm	0.004			
Aqua Regia Digestion								
Ba	ppm	124	Pr	ppm	2.42	Sm	ppm	2.11
Hg	ppm	0.094	Pt	ppb	< 5	Tm	ppm	0.084
Nd	ppm	10.1	Re	ppm	0.004			
Pd	ppb	14.3	Si	wt. %	0.092			
Infrared Combustion								
C	wt. %	2.38						
Borate Fusion XRF								
Al ₂ O ₃	wt. %	11.57	Fe	wt. %	6.40	S	wt. %	3.23
As	ppm	6815	K ₂ O	wt. %	1.48	SiO ₂	wt. %	52.83
Ba	ppm	490	MgO	wt. %	3.32	Sn	ppm	10.0
CaO	wt. %	6.22	MnO	wt. %	0.102	Sr	ppm	185
Cl	ppm	20.0	Na ₂ O	wt. %	3.88	TiO ₂	wt. %	0.451
Co	ppm	220	Ni	ppm	65	V	ppm	70
Cr	ppm	85	P	wt. %	0.058	Zn	ppm	50
Cu	ppm	180	Pb	ppm	35.0	Zr	ppm	165
Thermogravimetry								
LOI ¹⁰⁰⁰	wt. %	9.79						
Laser Ablation ICP-MS								
Ag	ppm	0.250	Hf	ppm	4.43	Sm	ppm	4.52
As	ppm	6905	Ho	ppm	0.70	Sn	ppm	2.10
Ba	ppm	421	In	ppm	< 0.05	Sr	ppm	184
Be	ppm	1.30	La	ppm	22.9	Ta	ppm	0.59
Bi	ppm	1.67	Lu	ppm	0.25	Tb	ppm	0.60
Cd	ppm	0.10	Mn	wt. %	0.079	Te	ppm	0.15
Ce	ppm	46.5	Mo	ppm	3.80	Th	ppm	7.04
Co	ppm	204	Nb	ppm	7.15	Ti	wt. %	0.266
Cr	ppm	73	Nd	ppm	22.3	Tl	ppm	0.40
Cs	ppm	3.87	Ni	ppm	57	Tm	ppm	0.27
Cu	ppm	176	Pb	ppm	14.0	U	ppm	2.47
Dy	ppm	3.36	Pr	ppm	5.86	V	ppm	68
Er	ppm	1.94	Rb	ppm	59	W	ppm	240
Eu	ppm	0.96	Re	ppm	< 0.01	Y	ppm	18.4
Ga	ppm	13.9	Sb	ppm	9.00	Yb	ppm	1.83
Gd	ppm	4.00	Sc	ppm	8.35	Zn	ppm	42.5
Ge	ppm	1.28	Se	ppm	< 5	Zr	ppm	157
Peroxide Fusion ICP								
W	ppm	250						
3-Acid Digestion (no HF)								
Ag	ppm	0.307	Gd	ppm	3.03	S	wt. %	3.66
Al ₂ O ₃	wt. %	12.18	Hf	ppm	2.45	Sc	ppm	7.90

SI unit equivalents: ppb (parts per billion; 1×10^{-9}) $\equiv$ $\mu\text{g/kg}$; ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg ; wt. % (weight per cent) $\equiv$ % (mass fraction).

Note: the number of significant figures reported is not a reflection of the level of certainty of stated values. They are instead an artefact of ORE's in-house CRM-specific LIMS.

Table 3 continued.

Constituent	Unit	Value	Constituent	Unit	Value	Constituent	Unit	Value
3-Acid Digestion (no HF) continued								
Ba	ppm	445	Ho	ppm	0.40	Sm	ppm	3.98
Be	ppm	1.37	K ₂ O	wt. %	1.63	Sn	ppm	1.77
Bi	ppm	1.58	La	ppm	23.5	Sr	ppm	198
CaO	wt. %	5.83	Li	ppm	23.2	Ta	ppm	0.51
Cd	ppm	0.10	MgO	wt. %	3.46	Tb	ppm	0.41
Ce	ppm	47.5	MnO	wt. %	0.100	Th	ppm	7.70
Co	ppm	261	Mo	ppm	4.10	TiO ₂	wt. %	0.465
Cr	ppm	60	Na ₂ O	wt. %	4.09	U	ppm	2.38
Cs	ppm	3.32	Nb	ppm	7.33	V	ppm	72
Cu	ppm	149	Nd	ppm	21.0	W	ppm	273
Dy	ppm	2.48	Ni	ppm	63	Y	ppm	10.4
Er	ppm	1.21	P ₂ O ₅	wt. %	0.132	Yb	ppm	1.03
Eu	ppm	1.01	Pb	ppm	13.8	Zn	ppm	47.0
Fe ₂ O ₃	wt. %	9.38	Pr	ppm	5.22	Zr	ppm	58
Ga	ppm	12.4	Rb	ppm	60			

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt. % (weight per cent) $\equiv$ % (mass fraction).

Note: the number of significant figures reported is not a reflection of the level of certainty of stated values. They are instead an artefact of ORE's in-house CRM-specific LIMS.

TABLE OF CONTENTS

INTRODUCTION	9
SOURCE MATERIAL	9
COMMUNITION AND HOMOGENISATION PROCEDURES	9
PHYSICAL PROPERTIES.....	10
MINERALOGY	10
ANALYTICAL PROGRAM	10
STATISTICAL ANALYSIS	11
Homogeneity Evaluation.....	12
PERFORMANCE GATES	14
PARTICIPATING LABORATORIES.....	18
PREPARER AND SUPPLIER	23
METROLOGICAL TRACEABILITY	23
COMMUTABILITY	24
INTENDED USE	24
MINIMUM SAMPLE SIZE.....	24
PERIOD OF VALIDITY & STORAGE INSTRUCTIONS	25
INSTRUCTIONS FOR HANDLING & CORRECT USE	25
LEGAL NOTICE.....	26
DOCUMENT HISTORY	26
CERTIFYING OFFICER	26
QMS CERTIFICATION.....	27
REFERENCES	27

LIST OF TABLES

Table 1. Certified Value, Uncertainty & Tolerance Intervals for Au by FA and elements by 4-Acid Digestion and Aqua Regia Digestion in in OREAS 289.....	2
Table 2. Certified Value, Uncertainty & Tolerance Intervals for other measurands in OREAS 289.	5
Table 3. Indicative Values for OREAS 289.....	6
Table 4. Physical properties of OREAS 289.....	10
Table 5. Indicative mineralogy of OREAS 289 based on semi-quantitative XRD analysis.	10
Table 6. Neutron Activation Analysis of Au on 20 x 85mg subsamples.	13
Table 7. Performance Gates for OREAS 289.....	15

LIST OF FIGURES

Figure 1. Au by Fire Assay in OREAS 289	19
Figure 2. Au by PhotonAssay in OREAS 289.....	20
Figure 3. Au by Aqua Regia digestion in OREAS 289.....	21
Figure 4. Au by Cyanide Leach in OREAS 289.....	22

INTRODUCTION

OREAS reference materials are intended to provide a low-cost method of evaluating and improving the quality of analysis of geological samples. To the geologist they provide a means of implementing quality control in analytical data sets generated in exploration from the grass roots level through to prospect evaluation, and in grade control at mining operations. To the analyst they provide an effective means of calibrating analytical equipment, assessing new techniques and routinely monitoring in-house procedures. OREAS reference materials enable users to successfully achieve process control of these tasks because the observed variance from repeated analysis has its origin almost exclusively in the analytical process rather than the reference material itself. In evaluating laboratory performance with this CRM, the section headed 'Instructions for correct use' should be read carefully.

Table 1 (all laboratories accredited to ISO 17025) and Table 2 (most laboratories accredited to ISO 17025) provide the certified values and their associated 95% expanded uncertainty and tolerance intervals, Table 3 shows indicative values including major and trace element characterisation, Table 4 provides some indicative physical properties and Table 5 provides indicative mineralogy based on semi-quantitative XRD analysis. Gold homogeneity (via INAA) is shown in Table 6 and is also demonstrated by a nested ANOVA (see 'Homogeneity Evaluation' section) and Table 7 presents the performance gate intervals for all certified values.

Tabulated results of all analytes together with uncorrected means, medians, standard deviations, relative standard deviations and per cent deviation of lab means from the corrected mean of means (PDM³) are presented in the detailed certification data for this CRM (**OREAS 289-DataPack.1.0.240504_000746.xlsx**).

Results are also presented in scatter plots for gold by fire assay, PhotonAssay™, aqua regia digestion and cyanide leach and (Figures 1 to 4, respectively) together with $\pm 3SD$ (magenta) and $\pm 5\%$ (yellow) control lines and certified value (green line). Accepted individual results are coloured blue and individual and dataset outliers are identified in red and violet, respectively.

SOURCE MATERIAL

OREAS 289 is one of a suite of six gold ore CRMs (OREAS 284 to OREAS 289) prepared from a blend of ore and barren granodiorite. The ore (Yalea deposit) was sourced from the Loulo-Gounkoto Complex in Western Mali. The barren granodiorite was sourced from the Late Devonian Bulla Granodiorite complex (mafic S-Type) located in northern Melbourne, Australia.

COMMINUTION AND HOMOGENISATION PROCEDURES

The material constituting OREAS 289 was prepared in the following manner:

- Drying of ore and barren materials to constant mass at 105°C;
- Crushing and milling of the barren materials to >98% minus 75 microns;
- Crushing and multi-stage milling of the ore material to 100% minus 30 microns;
- Check analysis of ore for contained gold concentration;

- Blending the ore and barren materials in appropriate proportions to achieve the desired grade;
- Homogenisation using OREAS' novel processing technologies;
- Packaging in 60g units sealed under nitrogen in laminated foil sachets.

PHYSICAL PROPERTIES

OREAS 289 was tested at ORE Research & Exploration Pty Ltd's onsite facility for various physical properties. Table 4 presents these findings that should be used for informational purposes only.

Table 4. Physical properties of OREAS 289.

Bulk Density (kg/m ³)	Moisture (wt.%)	Munsell Notation [‡]	Munsell Color [‡]
705	0.36	N6	Medium Light Gray

[‡]The Munsell Rock Color Chart helps geologists and archeologists communicate with colour more effectively by cross-referencing ISCC-NBS colour names with unique Munsell alpha-numeric colour notations for rock colour samples.

MINERALOGY

The semi-quantitative XRD results shown in Table 5 below were undertaken by ALS Metallurgy in Balcatta, Western Australia. The results have been normalised to 100 per cent and represent the relative proportion of crystalline material. Totals greater or less than 100 per cent are due to rounding errors. A trace of tourmaline group mineral(s) may be present where it is not reported. Some amorphous material might be present.

Table 5. Indicative mineralogy of OREAS 289 based on semi-quantitative XRD analysis.

Mineral / Mineral Group	% (mass ratio)
Kandite group	< 1
Chlorite	3
Annite - biotite - phlogopite	25
Muscovite	2
Cordierite and/or Na-Ca amphibole	1
Tourmaline group	0
Plagioclase	27
K-feldspar	4
Quartz	19
Dolomite - ankerite	11
Pyrite	6
Arsenopyrite	2

ANALYTICAL PROGRAM

Forty-nine commercial analytical laboratories participated in the program to characterise OREAS 289. The following methods were employed:

- Gold by fire assay (25-50g charge weight) with AAS (19 laboratories) and ICP-OES (12 laboratories) finish;

- Gold by Chrysos' PhotonAssay™ (protocol PAAU02) with recommended gross mass 440-470 g (15 laboratories).
- Gold by aqua regia digestion (10-50g sample weight) with ICP-MS (14 laboratories) or AAS (8 laboratories) finish;
- Gold by cyanide leach; a variety of cyanide leach methods were undertaken by the participating laboratories including the use of LeachWELL tablets, alkaline added sodium cyanide solution as well as sodium cyanide liquor with LeachWELL powder. The sample weights included: 5g (2 laboratories by AAS finish), 15g (2 laboratories by AAS finish), 30g (4 laboratory by AAS finish, 1 laboratory by ICP-OES finish), 50g (1 laboratory by AAS and 2 laboratories by ICP-MS finish) and 200g (6 laboratories by AAS, 1 laboratory by ICP-OES/AAS finish and 1 laboratory by ICP-MS finish);
- Full ICP-OES and ICP-MS elemental suites by 4-acid ($\text{HNO}_3\text{-HF-HClO}_4\text{-HCl}$) digestion (up to 26 laboratories depending on the element);
- Full ICP-OES and ICP-MS elemental suites by aqua regia digestion (up to 29 laboratories depending on the element).

Instrumental neutron activation analysis for Au on 20 x 85mg subsamples was also undertaken at ANSTO, Lucas Heights to confirm homogeneity (see Table 6 below).

Table 3 shows indicative values including major and trace element characterisation based on two samples analysed at Bureau Veritas in Perth, Western Australia which includes:

- Major oxides by lithium borate fusion with X-ray fluorescence;
- LOI at 1000°C by thermogravimetric analyser;
- Trace elements by laser ablation (on the fused bead) with ICP-MS finish;
- Total Carbon by infrared combustion furnace.

For the round robin program, ten 5kg test units were taken at predetermined intervals during the bagging stage, immediately following homogenisation and are considered representative of the entire prepared batch. Apart from the PhotonAssay™ program, six pulp samples were submitted to each laboratory for analysis (the weight provided depended on whether the laboratory was anticipated to undertake assays by gold cyanide leach). The samples received by each laboratory were obtained by taking a sample from six different 3kg test units to maximise representation. The 20 individual INAA results upon which much of the homogeneity evaluation is based, included paired 10g samples taken from 10 different sampling units. This format enabled a nested ANOVA treatment of the INAA results to evaluate homogeneity (see 'Homogeneity Evaluation' section below).

For the PhotonAssay™ program, each of the fifteen participating laboratories was sent three pre-packed and labelled (by OREAS Pty Ltd) PhotonAssay™ jars with instructions to assay each jar in duplicate, generating a total of six results per laboratory. The mass of reference material in each PhotonAssay™ jar was standardised for each unique OREAS code to maintain a consistent fill factor. The jars were fitted with induction sealed wads under the lids to mitigate sample loss, cross-contamination, oxidation and change in hygroscopic moisture.

STATISTICAL ANALYSIS

Certified Values and their uncertainty intervals (Tables 1 and 2) have been determined for each analyte following removal of individual, laboratory dataset (batch) and 3SD outliers (single iteration).

For individual outliers within a laboratory batch the z-score test is used in combination with a second method that determines the per cent deviation of the individual value from the batch median. Outliers in general are selected on the basis of z-scores > 2.5 and with per cent deviations (i) > 3 and (ii) more than three times the average absolute per cent deviation for the batch. Each laboratory data set mean is tested for outlying status based on z-score discrimination and rejected if > 2.5 . After individual and laboratory data set (batch) outliers have been eliminated a non-iterative 3 standard deviation filter is applied, with those values lying outside this window also relegated to outlying status. However, while statistics are taken into account, the exercise of a statistician's prerogative plays a significant role in identifying outliers.

Certified Values are the means of accepted laboratory means after outlier filtering and are the present best estimate of the true value. The INAA data (see Table 6) is omitted from determination of the certified value for Au and is used solely for the calculation of Tolerance Limits and homogeneity evaluation.

95% Expanded Uncertainty provides a 95% probability that the true value of the analyte under consideration lies between the upper and lower limits and is calculated according to the method outlined in ISO 98-3:2008 [6]. All known or suspected sources of bias have been investigated or taken into account.

Indicative (uncertified) values (Table 3) are present where the number of laboratories reporting a particular analyte is insufficient (< 5) to support certification or where interlaboratory consensus is poor. This data is intended for 'informational purposes' only.

Homogeneity Evaluation

The tolerance limits (ISO 16269:2014) shown in Tables 1 and 2 were determined using an analysis of precision errors method and are considered a conservative estimate of true homogeneity. The meaning of tolerance limits may be illustrated for copper by 4-acid digestion, where 99% of the time ($1-\alpha=0.99$) at least 95% of subsamples ($p=0.95$) will have concentrations lying between 26.6 and 28.6 ppm. Put more precisely, this means that if the same number of subsamples were taken and analysed in the same manner repeatedly, 99% of the tolerance intervals so constructed would cover at least 95% of the total population, and 1% of the tolerance intervals would cover less than 95% of the total population (ISO Guide 35). ***Please note that tolerance limits pertain to the homogeneity of the CRM only and should not be used as control limits for laboratory performance.***

The homogeneity of gold has been determined by INAA at ANSTO using the reduced analytical subsample method which utilises the known relationship between standard deviation and analytical subsample weight (Ingamells and Switzer, 1973 [2]). In this approach the sample aliquot is substantially reduced to a point where most of the variability in replicate assays should be due to inhomogeneity of the reference material and measurement error becomes negligible. Table 6 below shows the gold INAA data determined on 20 x 85mg subsamples of OREAS 289. An equivalent scaled version of the results is also provided to demonstrate an appreciation of what this data means if 30g fire assays were undertaken without the normal measurement error associated with this methodology. In this instance, the 1RSD of 0.09% calculated for a 30g fire assay sample (1.60% at 85mg weights) confirms the high level of gold homogeneity in OREAS 289.

Table 6. Neutron Activation Analysis of Au (in ppm) on 20 x 85mg subsamples and showing the equivalent results scaled to a 30g sample mass typical of fire assay determination.

Replicate No	Au 85mg actual	Au 30g equivalent*
1	5.916	5.904
2	5.955	5.906
3	5.955	5.906
4	5.824	5.899
5	5.851	5.900
6	6.094	5.913
7	5.849	5.900
8	5.859	5.901
9	5.934	5.905
10	5.986	5.908
11	5.796	5.897
12	5.733	5.894
13	5.905	5.903
14	5.962	5.906
15	5.845	5.900
16	5.754	5.895
17	5.980	5.907
18	6.074	5.912
19	5.917	5.904
20	5.872	5.901
Mean	5.903	5.903
Median	5.911	5.904
Std Dev.	0.094	0.005
Rel.Std.Dev.	1.599%	0.085%

*Results calculated for a 30g equivalent sample mass using the formula: $x^{30g Eq} = \frac{(x^{INAA} - \bar{X}) \times RSD@30g}{RSD@85mg} + \bar{X}$

where $x^{30g Eq}$ = equivalent result calculated for a 30g sample mass

(x^{INAA}) = raw INAA result at 85mg

$\bar{X}$ = mean of 85mg INAA results

The homogeneity of OREAS 289 has also been evaluated in an Analysis of Variance (**ANOVA**) of the INAA data. The 20 samples were comprised of paired samples from each of 10 sampling lot intervals (representative of the prepared batch) and were randomised prior to assigning sample numbers. The duplicate samples enabled an ANOVA by comparison of within- and between-unit variances across the 10 pairs. The purpose of the ANOVA is to test that no statistically significant difference exists in the variance between units to that of the variance within units. This allows an assessment of homogeneity across the entire prepared batch of OREAS 289. The test was performed using the following parameters:

- Gold INAA – 20 results (1 laboratory providing duplicate analyses on 10 samples where each sample can be viewed as a ‘unit’);
- Null Hypothesis, H_0 : Between-unit variance is no greater than within-unit variance (reject H_0 if p -value < 0.05);
- Alternative Hypothesis, H_1 : Between-unit variance is greater than within-unit variance.

The data was not filtered for outliers prior to the calculation of the p -value. This process derived a p -value of 0.23, a statistically insignificant result so the Null Hypothesis is accepted.

It is important to note that ANOVA is not an absolute measure of homogeneity. Rather, it establishes whether or not the analytes are distributed in a similar manner throughout the packaging run of OREAS 289 and whether the variance between two subsamples from the same unit is statistically distinguishable from the variance of two subsamples taken from any two separate units. A reference material therefore can possess poor absolute homogeneity yet still pass a relative homogeneity (ANOVA) test if the within-unit heterogeneity is large and similar across all units. Based on the statistical analysis of ANOVA and the results of the interlaboratory certification program, it can be concluded that OREAS 289 is fit-for-purpose as a certified reference material (see 'Intended Use' below).

PERFORMANCE GATES

The standard deviations (SD's) intervals reported in Table 7 provide an indication of a level of performance that might reasonably be expected from a laboratory being monitored by this CRM in a QA/QC program. They take into account errors attributable to measurement uncertainty and CRM variability. For an effective CRM the contribution of the latter should be negligible in comparison to measurement errors. The Standard Deviation values include all sources of measurement uncertainty: between-lab variance, within-run variance (precision errors) and CRM variability.

In the application of SD's in monitoring performance it is important to note that not all laboratories function at the same level of proficiency and that different methods in use at a particular laboratory have differing levels of precision. Each laboratory has its own inherent SD (for a specific concentration level and analyte-method pair) based on the analytical process and this SD is not directly related to the round robin program (see 'Intended Use' section for more detail). The SD for each analyte's certified value is calculated from the same filtered data set used to determine the certified value, i.e., after removal of all individual, lab dataset (batch) and 3SD outliers (single iteration). These outliers can only be removed after the absolute homogeneity of the CRM has been independently established, i.e., the outliers must be confidently deemed to be analytical rather than arising from inhomogeneity of the CRM. ***The standard deviation is then calculated for each analyte from the pooled accepted analyses generated from the certification program.***

Table 7 below shows intervals calculated for two and three standard deviations. As a guide these intervals may be regarded as warning or rejection for multiple 2SD outliers, or rejection for individual 3SD outliers in QC monitoring, although their precise application should be at the discretion of the QC manager concerned (also see 'Intended Use' section below). Westgard Rules extend the basics of single-rule QC monitoring using multi-rules (for more information visit www.westgard.com/mltrule.htm). A second method utilises a 5% window calculated directly from the certified value.

Standard deviation is also shown in relative percent for one, two and three relative standard deviations (1RSD, 2RSD and 3RSD) to facilitate an appreciation of the magnitude of these numbers and a comparison with the 5% window. Caution should be exercised when concentration levels approach lower limits of detection of the analytical methods employed as performance gates calculated from standard deviations tend to be excessively wide whereas those determined by the 5% method are too narrow. One approach used at commercial laboratories is to set the acceptance criteria at twice the detection level (DL) $\pm 10\%$.

I.e., Certified Value $\pm 10\% \pm 2DL$ [1].

Table 7. Performance Gates for OREAS 289.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Pb Fire Assay											
Au, ppm	5.71	0.202	5.31	6.12	5.11	6.32	3.53%	7.07%	10.60%	5.43	6.00
PhotonAssay™ (recommended gross mass 440-470 g)											
Au, ppm	5.73	0.125	5.48	5.98	5.36	6.11	2.18%	4.35%	6.53%	5.44	6.02
Aqua Regia Digestion (sample mass 10-50g)											
Au, ppm	5.51	0.327	4.86	6.17	4.53	6.50	5.94%	11.87%	17.81%	5.24	5.79
Cyanide Leach											
Au, ppm	5.17	0.209	4.75	5.59	4.54	5.80	4.04%	8.08%	12.13%	4.91	5.43
4-Acid Digestion											
Ag, ppm	0.239	0.018	0.203	0.275	0.185	0.293	7.51%	15.02%	22.53%	0.227	0.251
Al, wt. %	5.96	0.240	5.48	6.44	5.24	6.68	4.03%	8.05%	12.08%	5.66	6.26
As, ppm	7080	353	6374	7786	6021	8139	4.99%	9.97%	14.96%	6726	7434
Ba, ppm	439	20	399	479	379	499	4.56%	9.11%	13.67%	417	461
Be, ppm	1.19	0.063	1.07	1.32	1.01	1.38	5.26%	10.53%	15.79%	1.13	1.25
Bi, ppm	1.62	0.098	1.42	1.81	1.32	1.91	6.08%	12.15%	18.23%	1.54	1.70
Ca, wt. %	4.33	0.160	4.01	4.65	3.85	4.81	3.69%	7.38%	11.07%	4.11	4.55
Cd, ppm	0.10	0.01	0.08	0.13	0.06	0.15	13.52%	27.03%	40.55%	0.10	0.11
Ce, ppm	47.7	3.43	40.9	54.6	37.4	58.0	7.19%	14.39%	21.58%	45.3	50.1
Co, ppm	203	8	188	219	180	227	3.89%	7.78%	11.67%	193	214
Cr, ppm	52	7	38	65	32	72	12.99%	25.98%	38.97%	49	54
Cs, ppm	4.11	0.200	3.71	4.51	3.51	4.71	4.85%	9.71%	14.56%	3.91	4.32
Cu, ppm	176	6	164	188	158	194	3.41%	6.83%	10.24%	167	185
Dy, ppm	2.54	0.133	2.28	2.81	2.14	2.94	5.24%	10.47%	15.71%	2.42	2.67
Er, ppm	1.23	0.087	1.05	1.40	0.96	1.49	7.11%	14.22%	21.34%	1.16	1.29
Eu, ppm	0.97	0.038	0.89	1.04	0.85	1.08	3.93%	7.87%	11.80%	0.92	1.01
Fe, wt. %	6.21	0.240	5.73	6.69	5.48	6.93	3.87%	7.74%	11.61%	5.90	6.52
Ga, ppm	14.3	0.86	12.6	16.0	11.7	16.9	6.04%	12.08%	18.12%	13.6	15.0
Gd, ppm	3.69	0.192	3.30	4.07	3.11	4.26	5.20%	10.40%	15.60%	3.50	3.87
Hf, ppm	1.96	0.158	1.64	2.28	1.49	2.44	8.08%	16.16%	24.23%	1.86	2.06
Ho, ppm	0.45	0.05	0.34	0.56	0.29	0.62	12.08%	24.16%	36.24%	0.43	0.47
In, ppm	0.050	0.004	0.042	0.058	0.038	0.063	8.23%	16.46%	24.69%	0.048	0.053
K, wt. %	1.27	0.047	1.17	1.36	1.13	1.41	3.73%	7.46%	11.20%	1.20	1.33
La, ppm	23.2	1.76	19.7	26.7	17.9	28.5	7.58%	15.16%	22.74%	22.1	24.4
Li, ppm	24.3	1.57	21.2	27.5	19.6	29.0	6.46%	12.93%	19.39%	23.1	25.5
Lu, ppm	0.17	0.016	0.14	0.20	0.13	0.22	9.01%	18.02%	27.03%	0.16	0.18
Mg, wt. %	1.89	0.055	1.78	2.00	1.72	2.05	2.91%	5.81%	8.72%	1.79	1.98
Mn, wt. %	0.076	0.003	0.071	0.081	0.068	0.083	3.32%	6.64%	9.95%	0.072	0.080
Mo, ppm	4.08	0.197	3.68	4.47	3.49	4.67	4.83%	9.66%	14.49%	3.88	4.28
Na, wt. %	2.87	0.100	2.67	3.07	2.57	3.17	3.49%	6.98%	10.47%	2.73	3.01
Nb, ppm	6.25	0.68	4.88	7.61	4.20	8.29	10.90%	21.81%	32.71%	5.93	6.56
Nd, ppm	21.8	0.78	20.2	23.3	19.4	24.1	3.60%	7.21%	10.81%	20.7	22.9
Ni, ppm	55	2.6	50	60	47	63	4.67%	9.34%	14.01%	52	58
P, wt. %	0.056	0.002	0.051	0.060	0.049	0.063	4.04%	8.08%	12.12%	0.053	0.059
Pb, ppm	13.7	0.75	12.2	15.2	11.5	16.0	5.44%	10.88%	16.32%	13.0	14.4

SI unit equivalents: ppm (parts per million; 1×10^6) $\equiv$ mg/kg; wt. % (weight per cent) $\equiv$ % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

Table 7 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
4-Acid Digestion continued											
Pr, ppm	5.60	0.332	4.93	6.26	4.60	6.59	5.94%	11.88%	17.82%	5.32	5.88
Rb, ppm	63	3.0	57	69	54	72	4.68%	9.37%	14.05%	60	66
S, wt.%	3.28	0.110	3.06	3.50	2.95	3.61	3.35%	6.71%	10.06%	3.11	3.44
Sb, ppm	7.98	0.624	6.73	9.23	6.11	9.85	7.82%	15.64%	23.46%	7.58	8.38
Sc, ppm	8.43	0.654	7.12	9.74	6.47	10.39	7.76%	15.52%	23.28%	8.01	8.85
Sm, ppm	4.38	0.220	3.94	4.82	3.72	5.04	5.03%	10.05%	15.08%	4.16	4.59
Sn, ppm	1.98	0.178	1.62	2.34	1.44	2.52	9.01%	18.03%	27.04%	1.88	2.08
Sr, ppm	191	7	176	206	169	214	3.89%	7.78%	11.66%	182	201
Ta, ppm	0.53	0.038	0.46	0.61	0.42	0.65	7.15%	14.30%	21.45%	0.51	0.56
Tb, ppm	0.49	0.027	0.44	0.55	0.41	0.57	5.45%	10.90%	16.35%	0.47	0.52
Te, ppm	0.21	0.04	0.13	0.29	0.08	0.33	19.91%	39.82%	59.74%	0.20	0.22
Th, ppm	7.01	0.466	6.08	7.95	5.61	8.41	6.65%	13.30%	19.95%	6.66	7.36
Ti, wt.%	0.226	0.025	0.177	0.275	0.152	0.300	10.89%	21.78%	32.67%	0.215	0.237
Tl, ppm	0.44	0.026	0.39	0.49	0.36	0.52	5.90%	11.79%	17.69%	0.42	0.46
Tm, ppm	0.18	0.016	0.15	0.21	0.13	0.23	9.09%	18.18%	27.27%	0.17	0.19
U, ppm	2.39	0.206	1.97	2.80	1.77	3.00	8.64%	17.28%	25.92%	2.27	2.51
V, ppm	64	4.4	55	72	51	77	6.86%	13.72%	20.59%	60	67
W, ppm	235	8	218	252	209	260	3.61%	7.22%	10.83%	223	246
Y, ppm	12.2	0.76	10.7	13.7	10.0	14.5	6.20%	12.40%	18.59%	11.6	12.8
Yb, ppm	1.14	0.081	0.98	1.31	0.90	1.39	7.10%	14.21%	21.31%	1.09	1.20
Zn, ppm	43.6	1.82	39.9	47.2	38.1	49.0	4.18%	8.36%	12.54%	41.4	45.7
Zr, ppm	67	7	53	81	46	87	10.34%	20.68%	31.02%	63	70
Aqua Regia Digestion											
Ag, ppm	0.233	0.015	0.202	0.263	0.187	0.278	6.53%	13.06%	19.59%	0.221	0.244
Al, wt.%	1.07	0.079	0.91	1.23	0.83	1.31	7.42%	14.84%	22.27%	1.01	1.12
As, ppm	6918	314	6291	7545	5977	7859	4.53%	9.07%	13.60%	6572	7264
B, ppm	10.9	1.6	7.8	14.0	6.2	15.6	14.32%	28.64%	42.97%	10.3	11.4
Be, ppm	0.63	0.08	0.48	0.79	0.40	0.87	12.47%	24.95%	37.42%	0.60	0.67
Bi, ppm	1.64	0.116	1.41	1.87	1.29	1.99	7.08%	14.17%	21.25%	1.56	1.72
Ca, wt.%	3.80	0.153	3.49	4.11	3.34	4.26	4.03%	8.05%	12.08%	3.61	3.99
Cd, ppm	0.063	0.011	0.041	0.085	0.030	0.096	17.49%	34.98%	52.46%	0.060	0.066
Ce, ppm	19.9	3.7	12.5	27.4	8.8	31.1	18.65%	37.30%	55.95%	18.9	20.9
Co, ppm	199	11	178	221	168	231	5.30%	10.61%	15.91%	189	209
Cr, ppm	39.2	2.09	35.1	43.4	33.0	45.5	5.34%	10.67%	16.01%	37.3	41.2
Cs, ppm	3.34	0.167	3.01	3.68	2.84	3.85	4.99%	9.98%	14.97%	3.18	3.51
Cu, ppm	176	8	160	192	152	200	4.52%	9.05%	13.57%	168	185
Dy, ppm	1.56	0.112	1.34	1.78	1.22	1.89	7.16%	14.31%	21.47%	1.48	1.64
Er, ppm	0.67	0.055	0.56	0.78	0.50	0.84	8.22%	16.43%	24.65%	0.64	0.70
Eu, ppm	0.38	0.09	0.19	0.56	0.10	0.65	24.19%	48.39%	72.58%	0.36	0.40
Fe, wt.%	5.97	0.348	5.28	6.67	4.93	7.02	5.83%	11.65%	17.48%	5.67	6.27
Ga, ppm	4.41	0.219	3.97	4.85	3.75	5.07	4.97%	9.93%	14.90%	4.19	4.63
Gd, ppm	2.04	0.41	1.22	2.86	0.80	3.28	20.19%	40.38%	60.58%	1.94	2.14
Ge, ppm	0.083	0.016	0.051	0.115	0.036	0.131	19.05%	38.10%	57.16%	0.079	0.087

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt. % (weight per cent) $\equiv$ % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding; IND = indeterminate.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

Table 7 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Aqua Regia Digestion continued											
Hf, ppm	0.29	0.021	0.25	0.34	0.23	0.36	7.31%	14.62%	21.93%	0.28	0.31
Ho, ppm	0.24	0.02	0.20	0.29	0.17	0.32	10.05%	20.10%	30.14%	0.23	0.26
In, ppm	0.041	0.004	0.033	0.050	0.029	0.054	10.18%	20.35%	30.53%	0.039	0.044
K, wt. %	0.399	0.025	0.348	0.450	0.323	0.476	6.37%	12.75%	19.12%	0.379	0.419
La, ppm	8.53	1.75	5.02	12.03	3.27	13.78	20.53%	41.07%	61.60%	8.10	8.95
Li, ppm	20.1	1.66	16.8	23.4	15.1	25.1	8.26%	16.52%	24.78%	19.1	21.1
Lu, ppm	0.076	0.006	0.064	0.088	0.059	0.094	7.64%	15.28%	22.92%	0.072	0.080
Mg, wt. %	1.80	0.084	1.63	1.97	1.55	2.05	4.67%	9.33%	14.00%	1.71	1.89
Mn, wt. %	0.075	0.005	0.066	0.084	0.061	0.089	6.24%	12.48%	18.71%	0.071	0.079
Mo, ppm	3.94	0.320	3.30	4.58	2.98	4.90	8.12%	16.23%	24.35%	3.74	4.14
Na, wt. %	0.147	0.012	0.122	0.171	0.110	0.184	8.35%	16.70%	25.06%	0.139	0.154
Nb, ppm	0.75	0.22	0.31	1.18	0.10	1.40	29.08%	58.16%	87.24%	0.71	0.78
Ni, ppm	49.5	3.07	43.4	55.7	40.3	58.8	6.20%	12.40%	18.60%	47.1	52.0
P, wt. %	0.049	0.003	0.043	0.054	0.040	0.057	6.07%	12.14%	18.20%	0.046	0.051
Pb, ppm	6.79	0.438	5.91	7.67	5.47	8.10	6.45%	12.91%	19.36%	6.45	7.13
Rb, ppm	37.0	3.21	30.6	43.5	27.4	46.7	8.66%	17.33%	25.99%	35.2	38.9
S, wt. %	3.24	0.132	2.98	3.51	2.85	3.64	4.07%	8.15%	12.22%	3.08	3.41
Sb, ppm	5.55	0.72	4.10	7.00	3.37	7.72	13.06%	26.12%	39.17%	5.27	5.82
Sc, ppm	6.00	0.425	5.16	6.85	4.73	7.28	7.07%	14.14%	21.22%	5.70	6.30
Se, ppm	1.29	0.18	0.93	1.65	0.75	1.83	13.99%	27.97%	41.96%	1.23	1.35
Sn, ppm	1.35	0.086	1.18	1.53	1.10	1.61	6.35%	12.70%	19.05%	1.29	1.42
Sr, ppm	83	4.7	74	93	69	98	5.69%	11.38%	17.07%	79	88
Ta, ppm	< 0.01	IND	IND	IND	IND	IND	IND	IND	IND	IND	IND
Tb, ppm	0.29	0.04	0.22	0.37	0.18	0.41	12.99%	25.99%	38.98%	0.28	0.31
Te, ppm	0.19	0.02	0.14	0.24	0.12	0.27	12.88%	25.75%	38.63%	0.18	0.20
Th, ppm	2.37	0.47	1.43	3.32	0.96	3.79	19.90%	39.79%	59.69%	2.25	2.49
Ti, wt. %	0.097	0.007	0.083	0.111	0.076	0.118	7.14%	14.27%	21.41%	0.092	0.102
Tl, ppm	0.33	0.019	0.29	0.37	0.27	0.39	5.68%	11.37%	17.05%	0.31	0.35
U, ppm	1.42	0.109	1.20	1.64	1.09	1.75	7.66%	15.31%	22.97%	1.35	1.49
V, ppm	34.8	2.21	30.4	39.2	28.2	41.4	6.35%	12.70%	19.05%	33.1	36.6
W, ppm	183	14	155	212	141	226	7.68%	15.36%	23.04%	174	193
Y, ppm	6.61	0.533	5.54	7.67	5.01	8.21	8.06%	16.12%	24.18%	6.28	6.94
Yb, ppm	0.54	0.048	0.45	0.64	0.40	0.69	8.82%	17.65%	26.47%	0.52	0.57
Zn, ppm	40.1	2.59	34.9	45.3	32.3	47.9	6.46%	12.92%	19.38%	38.1	42.1
Zr, ppm	9.09	0.91	7.26	10.91	6.35	11.82	10.04%	20.08%	30.13%	8.63	9.54
Infrared Combustion											
S, wt. %	3.31	0.086	3.14	3.48	3.05	3.57	2.59%	5.17%	7.76%	3.14	3.48

SI unit equivalents: ppm (parts per million; 1×10^{-6}) $\equiv$ mg/kg; wt. % (weight per cent) $\equiv$ % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding; IND = indeterminate.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

PARTICIPATING LABORATORIES

1. Actlabs, Ancaster, Ontario, Canada
2. AGAT Laboratories, Calgary, Alberta, Canada
3. ALS, Canning Vale, WA, Australia
4. ALS, Johannesburg, South Africa
5. ALS, Kalgoorlie, WA, Australia
6. ALS, Lima, Peru
7. ALS, Loughrea, Galway, Ireland
8. ALS, Malaga, WA, Australia
9. ALS, Vancouver, BC, Canada
10. ALS Metallurgy, Perth (Balcatta), WA, Australia
11. American Assay Laboratories, Sparks, Nevada, USA
12. ANSTO, Lucas Heights, NSW, Australia
13. Bureau Veritas Commodities Canada Ltd, Vancouver, BC, Canada
14. Bureau Veritas Geoanalytical, Perth, WA, Australia
15. Bureau Veritas Mineral Solutions (BVMS), Al Wadi District, Jeddah, Saudi Arabia
16. CRS Laboratories Oy, Kempele, Northern Ostrobothnia, Finland
17. Gekko Assay Labs, Ballarat, VIC, Australia
18. Inspectorate (BV), Lima, Peru
19. Intertek Genalysis, Adelaide, SA, Australia
20. Intertek Genalysis, Perth, WA, Australia
21. Intertek Minerals Ltd, Bibiani, Western North Region, Ghana
22. Intertek Minerals Ltd, Tarkwa, Western Region, Ghana
23. Intertek Tarkwa, Tarkwa, Ghana
24. Intertek Testing Services, Townsville, QLD, Australia
25. Intertek Testing Services Philippines, Cupang, Muntinlupa, Philippines
26. Koza Gold (Ovacik Gold Mine), Bergama, Izmir, Turkey
27. MSA ENVAL Laboratories, Yamoussoukro, Côte d'Ivoire
28. MSALABS, Bougouni, Bamako, Mali
29. MSALABS, Prince George, BC, Canada
30. MSALABS, Val-d'Or, Quebec, Canada
31. MSALABS Bulyanhulu Gold Mine, Bubada, Shinyanga, United Republic of Tanzania
32. MSALABS Geita, Geita, Geita, United Republic of Tanzania
33. MSALABS Ghana Ltd, Obuasi, Ashanti, Ghana
34. MSALABS Kibali Gold Mines, Doko, Haut-Uélé, Congo, Democratic Republic of the (Zaire)
35. MSALABS Timmins, Timmins, Ontario, Canada
36. On Site Laboratory Services, Bendigo, VIC, Australia
37. Paragon Geochemical Laboratories, Sparks, Nevada, USA
38. PT Geoservices Ltd, Cikarang, Jakarta Raya, Indonesia
39. PT Intertek Utama Services, Jakarta Timur, DKI Jakarta, Indonesia
40. Ravenswood Gold, Ravenswood, QLD, Australia
41. Reminex Centre de Recherche, Marrakesh, Marrakesh-Safi, Morocco
42. Saskatchewan Research Council, Saskatoon, Saskatchewan, Canada
43. SGS Canada Inc., Vancouver, BC, Canada
44. SGS del Peru, Lima, Peru
45. SGS Geosol Laboratorios Ltda, Vespasiano, Minas Gerais, Brazil
46. SGS Tarkwa, Tarkwa, Western Region, Ghana
47. Shiva Analyticals Ltd, Bangalore North, Karnataka, India
48. Skyline Assayers & Laboratories, Tucson, Arizona, USA
49. Stewart Assay & Environmental Laboratories LLC, Kara-Balta, Chüy, Kyrgyzstan

Please note: To preserve anonymity, the above numbered alphabetical list of participating laboratories does not correspond with the Lab ID numbering on the scatter plots below.

Figure 1. Au by Pb Fire Assay in OREAS 289

SPC.1762.RR1.OREAS 289.2.Fire Assay.Au.Lab.240404.103547.SN

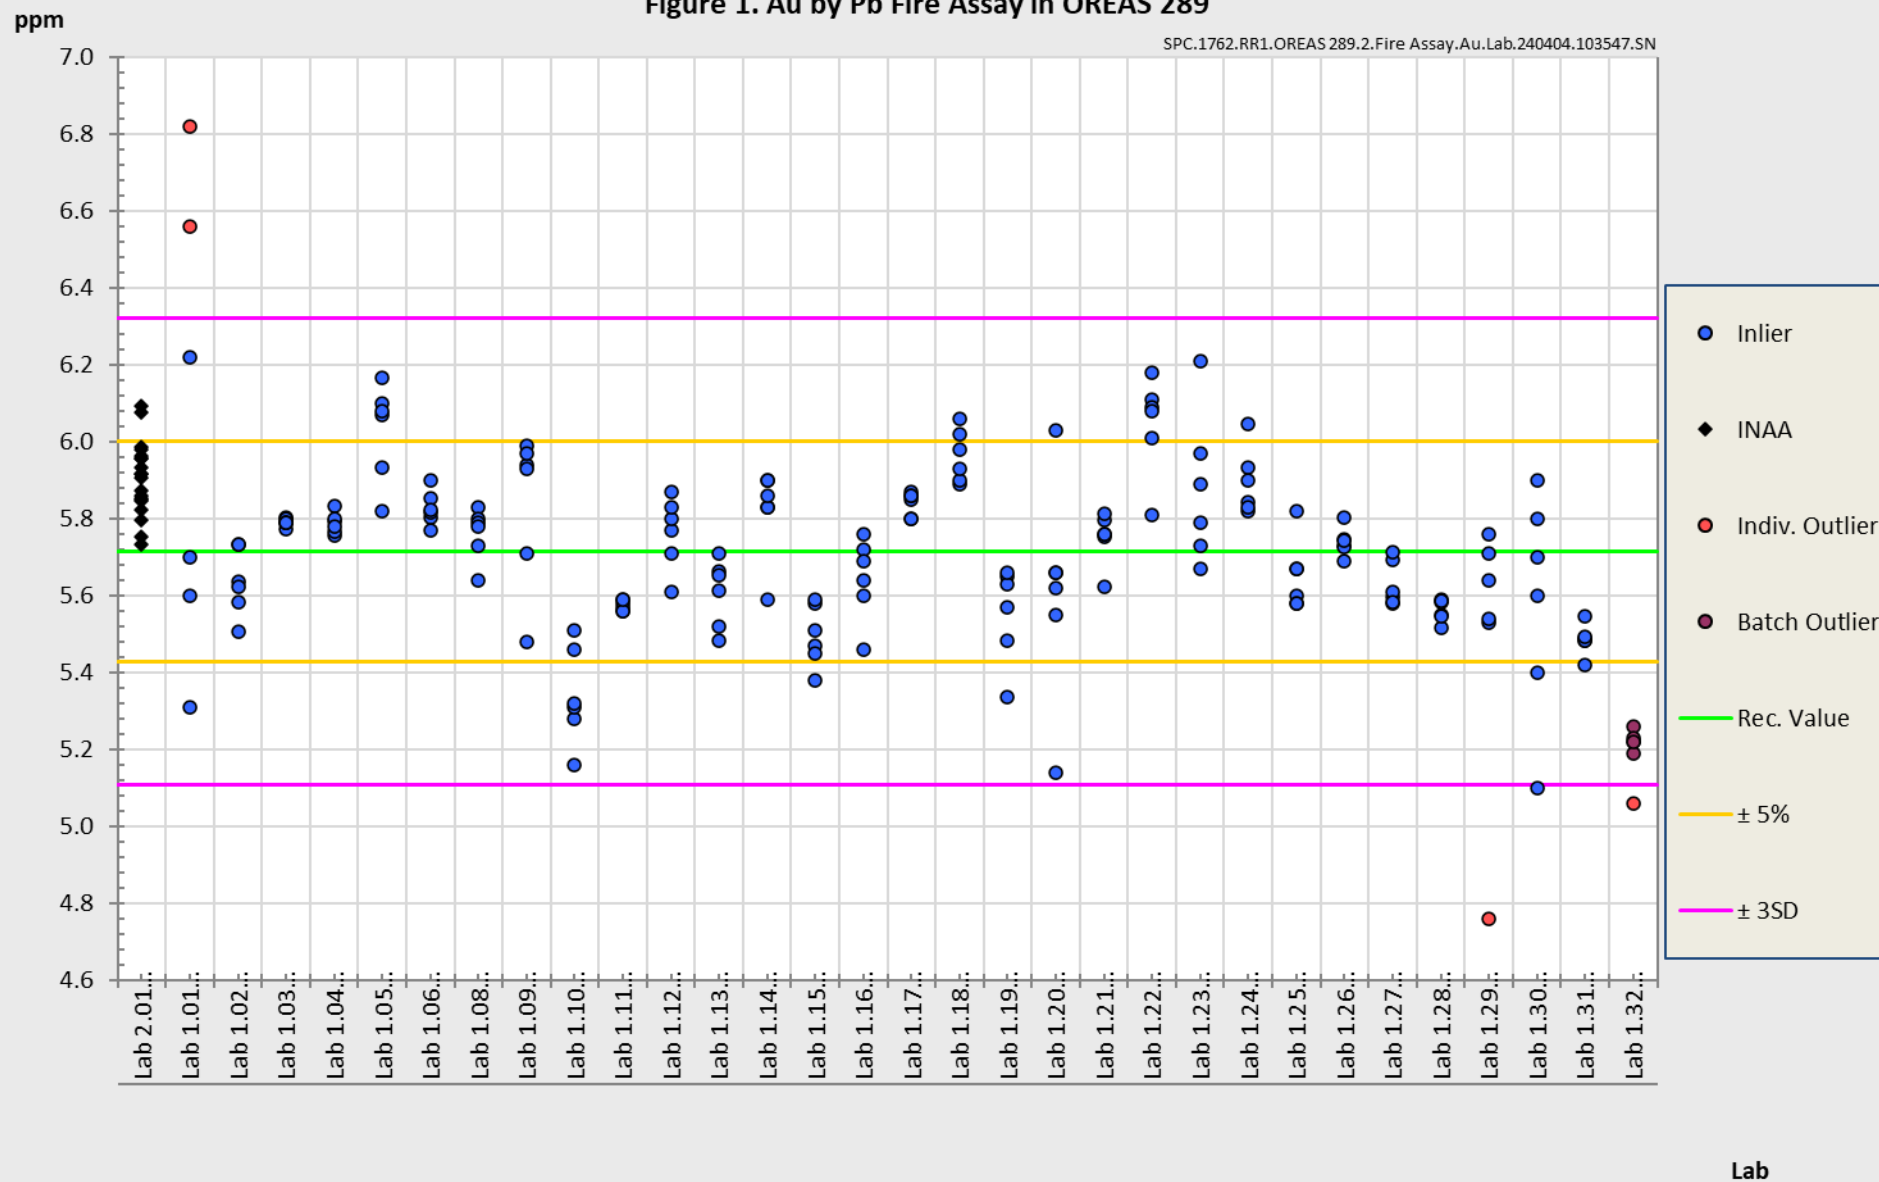


Figure 3. Au by Aqua Regia Digestion (sample weights 10-50g) in OREAS 289

SPC.1762.RR1.OREAS 289.2.AR Digest 10-50g.Au.Lab.240404.112926.SN


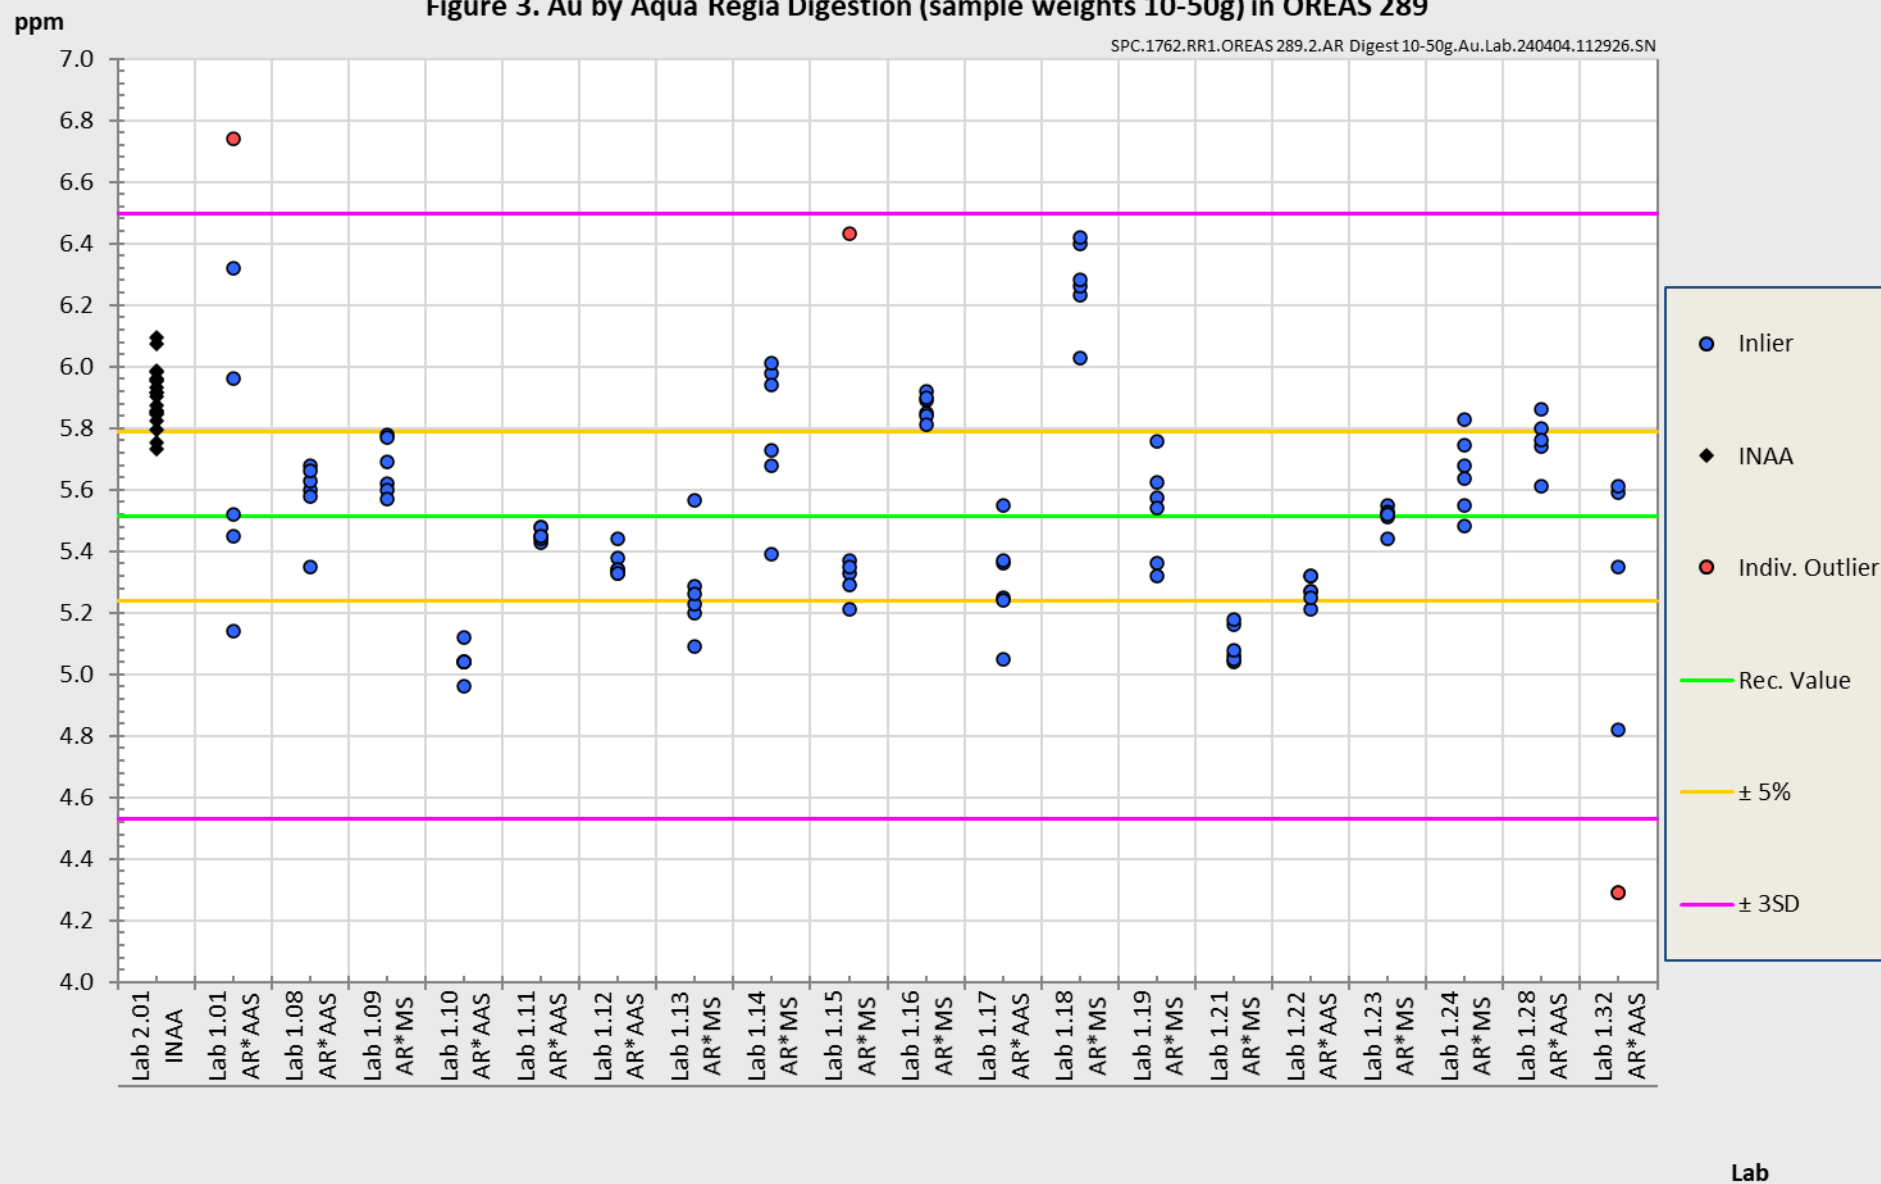


Figure 4. Au by Cyanide Leach in OREAS 289

SPC.1762.RR1.OREAS 289.2.CNL.Au.Lab.240404.113152.SN

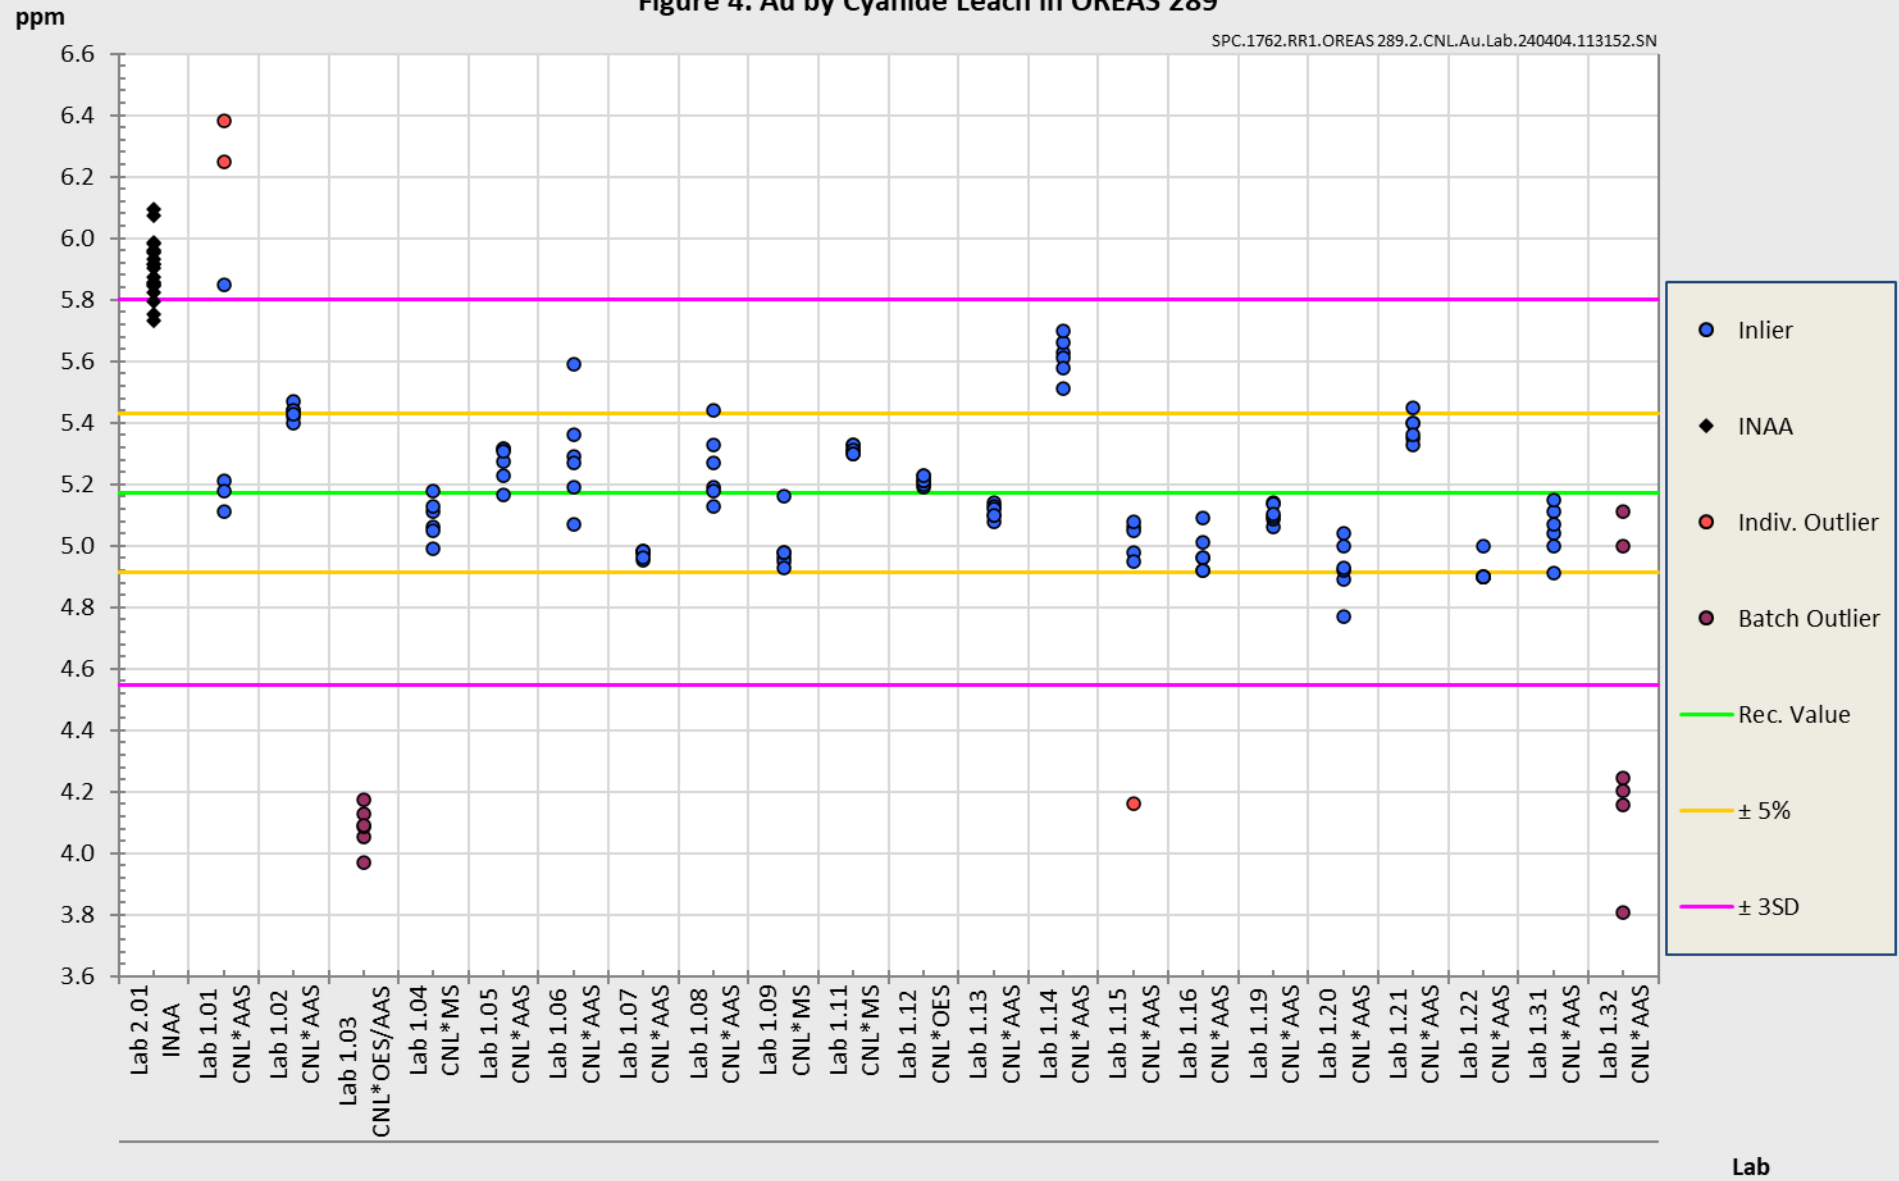

PREPARER AND SUPPLIER

Certified reference material OREAS 289 is prepared, certified and supplied by:



ORE Research & Exploration Pty Ltd
37A Hosie Street
Bayswater North VIC 3153
AUSTRALIA

Tel: +613-9729 0333
Web: www.oreas.com
Email: info@ore.com.au

METROLOGICAL TRACEABILITY

The interlaboratory results that underpin the certified values are metrologically traceable to the international measurement scale (SI) of mass (either as a % mass fraction or as milligrams per kilogram (mg/kg)). In line with popular use, all data within tables in this certificate are expressed as the mass fraction in either weight percent (wt.%) or parts per million (ppm).

The analytical samples sent to participating laboratories were selected in a manner to be representative of the entire prepared batch of CRM. This 'representivity' was maintained in each submitted laboratory sample batch and ensures the user that the data is traceable from sample selection through to the analytical results. The systematic sampling method was chosen due to the low risk of overlooking repetitive effects or trends in the batch due to the way the CRM was processed. In line with ISO 17025 [10], each analytical data set received from the participating laboratories has been validated by its assayer through the inclusion of internal reference materials and QC checks during and post analysis.

The participating laboratories were chosen on the basis of their competence (from past performance in interlaboratory programs undertaken by ORE Pty Ltd) for a particular analytical method, analyte or analyte suite and sample matrix. These laboratories are accredited to ISO 17025 for Au by fire assay, multi-elements by 4-acid digestion and multi-elements by aqua regia digestion (Table 1). The other operationally defined measurands characterised in this certificate (Table 2) are derived from data procured mostly from ISO 17025 accredited laboratories. The certified values presented in this report are calculated from the means of accepted data following robust technical and statistical analysis as detailed in this report.

Guide ISO/TR 16476:2016, section 5.3.1 describes metrological traceability in reference materials as it pertains to the transformation of the measurand. In this section it states, *"Although the determination of the property value itself can be made traceable to appropriate units through, for example, calibration of the measurement equipment used, steps like the transformation of the sample from one physical (chemical) state to another cannot. Such transformations may only be compared with a reference (when available), or among themselves. For some transformations, reference methods have been defined and may be used in certification projects to evaluate the uncertainty associated with such a transformation. In other cases, only a comparison among different laboratories using the same procedure is possible. In this case, it is impossible to demonstrate absence of method bias; therefore, the result is an operationally defined measurand (ISO Guide 35:2017, 9.2.4c)."* Certification takes place on the basis of agreement among operationally defined, independent measurement results.

COMMUTABILITY

The measurements of the results that underlie the certified values contained in this report were undertaken by methods involving pre-treatment (fusion/digestion) of the sample. This served to reduce the sample to a simple and well understood form permitting calibration using simple solutions of the CRM. Due to these methods being well understood and highly effective, commutability is not an issue for this CRM. All OREAS CRMs are sourced from natural ore minerals meaning they will display similar behaviour as routine 'field' samples in the relevant measurement process. Care should be taken to ensure 'matrix matching' as close as practically achievable. The matrix and mineralisation style of the CRM is described in the 'Source Material' section and users should select appropriate CRMs matching these attributes to the field samples being analysed.

INTENDED USE

OREAS 289 is intended to cover all activities needed to produce a measurement result. This includes extraction, possible separation steps and the actual measurement process (the signal producing step). OREAS 289 may be used to calibrate the entire procedure by producing a pure substance CRM transformed into a calibration solution.

OREAS 289 is intended for the following uses:

- For the monitoring of laboratory performance in the analysis of analytes reported in Tables 1 and 2 in geological samples;
- For the verification of analytical methods for analytes reported in Tables 1 and 2;
- For the calibration of instruments used in the determination of the concentration of analytes reported in Tables 1 and 2. When a value provided in this certificate is used to calibrate a measurement process, the uncertainty associated with that value should be appropriately propagated into the user's uncertainty calculation. Users can determine an approximation of the standard uncertainty by calculating one fourth of the width of the Expanded Uncertainty interval given in this certificate (Expanded Uncertainty intervals are provided in Tables 1 and 2).

MINIMUM SAMPLE SIZE

To relate analytical determinations to the values in this certificate, the minimum mass of sample used should match the typical mass that the laboratories used in the interlaboratory (round robin) certification program. This means that different minimum sample masses should be used depending on the operationally defined methodology as follows:

- Au by fire assay: $\geq 15\text{g}$;
- Au by PhotonAssay™: recommended gross mass* 440-470 g;
- Au by aqua regia digestion: $\geq 10\text{g}$;
- Au by cyanide leach: $\geq 5\text{g}$;
- 4-acid digestion with ICP-OES and/or MS finish: $\geq 0.25\text{g}$;
- Aqua regia digestion with ICP-OES and/or MS finish: $\geq 0.5\text{g}$.

**Gross mass refers to the mass of the entire jar assembly, including jar base, jar lid and contents. These value ranges were developed using a ~40g empty jar mass but should be achievable for any jar-lid combination.*

PERIOD OF VALIDITY & STORAGE INSTRUCTIONS

The certification of OREAS 289 remains valid, within the specified measurement uncertainties, until November 2038, provided the CRM is handled and stored in accordance with the instructions given below. This certification is nullified if the CRM is any way changed or contaminated.

Store in a clean and cool dry place away from direct sunlight.

Long-term stability will be monitored at appropriate intervals and purchasers notified if any changes are observed. The period of validity may well be indefinite and will be reassessed prior to expiry with the aim of extending the validity if possible.

Single-use sachets sealed under nitrogen (60g units)

OREAS 289 contains sulphides (3.3 wt.% Total Sulphur) and is packaged in single-use sachets sealed under nitrogen. Following analysis, it is the manufacturer's expectation that any remaining material is discarded unless the sachet is promptly resealed under nitrogen or vacuum. It is the user's responsibility to prevent contamination and minimise exposure to the atmosphere to avoid oxidation of the sulphide minerals.

INSTRUCTIONS FOR HANDLING & CORRECT USE

Pre-homogenisation of the CRM prior to subsampling and analysis is not necessary as there is no particle segregation under transport [13].

Fine powders pose a risk to eyes and lungs and therefore standard precautions including the use of safety glasses and dust masks are advised.

QC monitoring using multiples of the Standard Deviation (SD)

In the application of SD's in monitoring performance it is important to note that not all laboratories function at the same level of proficiency and that different methods in use at a particular laboratory have differing levels of precision. Each laboratory has its own inherent SD (for a specific concentration level and analyte-method pair) based on the analytical process and this SD is not directly related to the round robin program.

The majority of data generated in the round robin program was produced by a selection of world class laboratories. The SD's thus generated are more constrained than those that would be produced across a randomly selected group of laboratories. To produce more generally achievable SD's the 'pooled' SD's provided in this report include interlaboratory bias. This 'one size fits all' approach may require revision at the discretion of the QC manager concerned following careful scrutiny of QC control charts.

The performance gates shown in Table 7 are intended only to be used as a preliminary guide as to what a laboratory may be able to achieve. Over a period of time monitoring your own laboratory's data for this CRM, SD's should be calculated directly from your own laboratory's process. This will enable you to establish more specific performance gates that are fit for purpose for your application as well as the ability to monitor bias. If your long-term trend analysis shows an average value that is within the 95% expanded uncertainty then generally there is no cause for concern in regard to bias.

For use with the aqua regia digestion method

It is important to note that in the analytical industry there is no standardisation of the aqua regia digestion process. This method is a partial empirical digest and differences in recoveries for various analytes are commonplace. These are caused by variations in the digest conditions and can include the ratio of nitric to hydrochloric acids, acid strength, temperatures, leach times and secondary digestions. Recoveries for sulphide-hosted base metal sulphides approach total values, however, other analytes, in particular the lithophile elements, show greater sensitivity to method parameters. This can result in lack of consensus in an inter-laboratory certification program for these elements.

The approach applied here is to report certified values in those instances where reasonable agreement exists amongst a majority of participating laboratories. The results of specific laboratories may differ significantly from the certified values, but will, nonetheless, be valid and reproducible in the context of the specifics of the aqua regia method in use. Users of this reference material should, therefore, be mindful of this limitation when applying the certified values in a quality control program.

LEGAL NOTICE

Ore Research & Exploration Pty Ltd has prepared and statistically evaluated the property values of this reference material to the best of its ability. The Purchaser by receipt hereof releases and indemnifies Ore Research & Exploration Pty Ltd from and against all liability and costs arising from the use of this material and information.

© COPYRIGHT Ore Research & Exploration Pty Ltd.
Unauthorised copying, reproduction, storage or dissemination is prohibited.

DOCUMENT HISTORY

Revision No.	Date	Changes applied
4	13 th November, 2025	Updated the recommended gross mass for use in PhotonAssay analysis.
3	17 th September, 2025	Added “packaging under nitrogen” (top of page 10) and removed reference to “repeat-use packaging” (page 25).
2	13 th June, 2025	Updated the recommended gross mass for use in PhotonAssay analysis.
1	17 th June, 2024	Removed duplicate of Fig. 2 (changed Fig. 4 to Cyanide Leach).
0	22 nd May, 2024	First publication.

CERTIFYING OFFICER

Craig Hamlyn (B.Sc. Hons - Geology), Technical Manager - ORE P/L

QMS CERTIFICATION

ORE Pty Ltd is accredited for compliance with ISO 17034:2016.



ORE Pty Ltd is ISO 9001:2015 certified by Lloyd's Register Quality Assurance Ltd for its quality management system including development, manufacturing, certification and supply of CRMs.



REFERENCES

- [1] Govett, G.J.S. (1983). Handbook of Exploration Geochemistry, Volume 2: Statistics and Data Analysis in Geochemical Prospecting (Variations of accuracy and precision).
- [2] Ingamells, C. O. and Switzer, P. (1973). A Proposed Sampling Constant for Use in Geochemical Analysis, Talanta 20, 547-568.
- [3] ISO Guide 30:2015. Terms and definitions used in connection with reference materials.
- [4] ISO Guide 31:2015. Reference materials – Contents of certificates and labels.
- [5] ISO Guide 35:2017. Certification of reference materials - General and statistical principals.
- [6] ISO Guide 98-3:2008. Guide to the expression of uncertainty in measurement (GUM:1995).
- [7] ISO 16269:2014. Statistical interpretation of data – Part 6: Determination of statistical tolerance intervals.
- [8] ISO/TR 16476:2016, Reference Materials – Establishing and expressing metrological traceability of quantity values assigned to reference materials.
- [9] ISO 17025:2017, General requirements for the competence of testing and calibration laboratories.
- [10] ISO 17034:2016. General requirements for the competence of reference material producers.
- [11] Munsell Rock Color Book (2014). Rock-Color Chart Committee, Geological Society of America (GSA), Minnesota (USA).
- [12] OREAS-BUP-70-09-11: Statistical Analysis - OREAS Evaluation Method.
- [13] OREAS-TN-04-1498: Stability under transport; an experimental study of OREAS CRMs.
- [14] OREAS-TN-05-1674: Long-term storage stability; an experimental study of OREAS CRMs.
- [15] Thompson, A.; Taylor, B.N.; Guide for the Use of the International System of Units (SI); NIST Special Publication 811; U.S. Government Printing Office: Washington, DC (2008); available at: <https://physics.nist.gov/cuu/pdf/sp811.pdf> (accessed Nov 2021).
- [16] Van der Veen AMH and Pauwels, J. (2001). Uncertainty calculations in the certification of reference materials, Accred Qual Assur 6: 290-294.